


800LBS/350 KG Magnetic Lock

Specification

Model	Size(unit:mm)	Voltage	Current	Holding Force	Lock Signal	Door Singal	Door
XM-M350	260Lx54.7Wx29.6H	12V/24V DC	12V/500MA 24V/250MA	350kg(800Lbs)	No	No	Single
XM-M350S	260Lx54.7Wx29.6H	12V/24V DC	12V/500MA 24V/250MA	350kg(800Lbs)	Yes	No	Single
XM-M350ST	260Lx54.7Wx29.6H	12V/24V DC	12V/500MA 24V/250MA	350kg(800Lbs)	Yes	No	Single
XM-M350SB	260Lx54.7Wx29.6H	12V/24V DC	12V/500MA 24V/250MA	350kg(800Lbs)	Yes	No	Single
XM-350D	520Lx54.7Wx29.6H	12V/24V DC	12V/500MA 24V/250MA	350kg*2(800Lbs*2)	No	No	Double
XM350DS	260Lx54.7Wx29.6H	12V/24V DC	12V/500MA 24V/250MA	350kg*2(800Lbs*2)	Yes	No	Double
XM-350M	260Lx54.7Wx29.6H	12V/24V DC	12V/500MA 24V/250MA	350kg(800Lbs)	No	No	Single
XM-350MF	260Lx54.7Wx29.6H	12V/24V DC	12V/500MA 24V/250MA	350kg(800Lbs)	No	No	Single


Diagram(unit:mm)

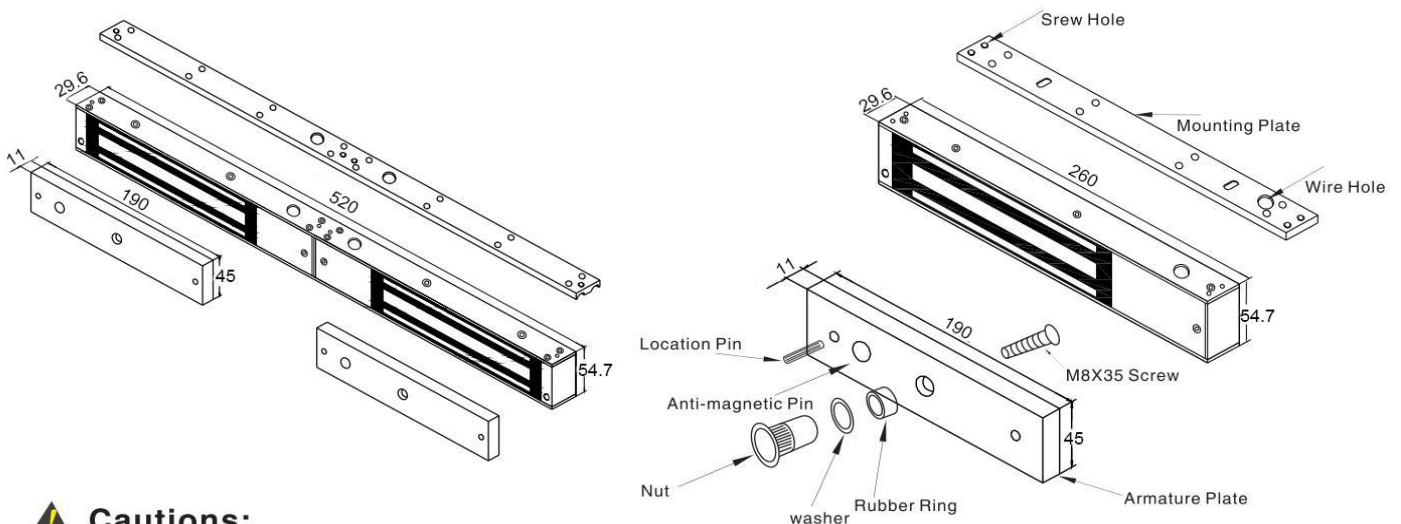


⚠ Cautions:

- The screw of armature plate should not be fixed too tight. Proper elasticity should be guaranteed for the rubber ring so that the armature plate can adjust itself to the appropriate position.
- Check the jumper's position before connecting. Figure out it represents 12VDC or 24VDC.
- Please keep the surface of the lock clean, or the force will be reduced because of the dust, glue or scotch tape on it.


Installation



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.



12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.




Hollow Metal Door

Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door

Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door

Inside: Drill a hole diameter is 8mm folding the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm


800LBS: 48mm

1200LBS: 46mm

Different brackets are available according to different types of doors. For example, narrow door , frameless glass door and inward opening door.


L Bracket-For outward opening door

When the door frame thickness is less than 42mm, L bracket is needed.





ZL Bracket-For inward opening door

For inward opening door, ZL bracket is needed.




U Bracket

For the frameless glass door. U bracket is needed.







I Bracket for armature plate

When the door frame is too thick, I bracket is needed.



Installation Instruction



Demonstration of I Bracket Installation

Demonstration of L Bracket Installation

Demonstration of ZL Bracket Installation

Demonstration of UL Bracket Installation

Circuit Board Diagram

A. 12VDC Input:

Required power 0.5Amp(Minimum).

Connect the positive(+)lead from a 12VDC power source to V +.

Connect the ground(-)lead from a 12VDC power source to V -.

Check jumper for 12 VDC operation.


B. 24VDC Input:

Required power 0.25Amp(Minimum).

Connect the positive(+)lead from a 24VDC power source to V +.

Connect the ground(-)lead from a 24VDC power source to V -.

Check jumper for 24 VDC operation.

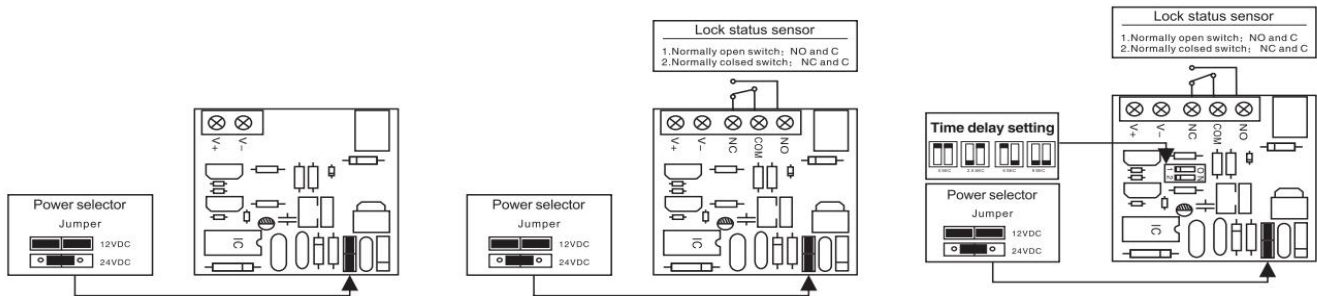

Wire Connection

