

Specification Sheet Network Cabinet

Network Cabinet

Model Name: 6U 10inch



Product Features:

- Reliable 10" international structure, Commercial type
- Glass front door (Front Single door glass and Rear steel door powder coated) with Round lock
- Front door hinges with over 180 degrees operation angle •Rear single flat metal door
- Removable side panels with plastic fasteners for easy operation
- Top with 1 fan holes (fans optional)
- Top wiring entrances : cable entrance with laser cutting
- Easy-to-disassemble front/rear/left/right doors enable convenient operation from any side of the rack

General characteristics:

| Product Description | Size W*D*H mm | h size in U | Width Overall mm | Width Rail to Rear Door mm | Depth Overall mm | Qty in Package | Package Volume | Gross Weight Kgs |
|---------------------|---------------|-------------|------------------|----------------------------|------------------|----------------|----------------|------------------|
| Network Cabinet | 312*300*300 | 6U | 312 | 10" | 300 | 1 | 0,06 | 4.3 |

Materials and specifications:

| N° | Item | Qty | Materials | Treatment | Note |
|----|------------------|-----|-------------------|----------------|----------------|
| 01 | Frame | 2 | 0.6mm SPCC steel | Powder coating | --- |
| 02 | Front glass door | 1 | 0.6mm SPCC steel | --- | ---- |
| 03 | Side panel | 2 | 0.6 mm SPCC steel | Powder coating | Removable |
| 04 | Rear panel | 1 | 0.6mm SPCC steel | Powder coating | --- |
| 05 | Front door lock | 1 | --- | --- | Round Lock |
| 06 | Top cover | 1 | 0.6 mm SPCC steel | Powder coating | --- |
| 07 | 10inch rails | 4 | SPCC T=1.0 | --- | --- |
| 08 | Bottom panel | 1 | SPCC T=0.6 | Powder coating | Optional parts |
| 10 | Screws and nuts | 20 | Steel | Brass plated | M5 |

Product description:

- Load capacity 20kg
- Exquisite design with precise dimension and craftsmanship
- Front single door with glass& Rear steel panel , Lockable door and side panels for system security.
- Fully adjustable vertical mounting rails
- Knockable wiring holes on top/bottom

Basic data:

- Width: 312mm
- Depth: 300mm
- Height: 6U

Standards:

- Comply with EN ISO 12100:2010 /EN 60204-1:2018 GB/ T19001-2016-ISO9001:2015 standard and ETSI standard Surface

Surface finish:

- Degrease, acid pickling, rust prevention and Parkerizing, pure water cleaning, static electricity powder coating.

Thickness:

- Mounting profile: 1.0 mm, others: 0.6mm

Materials:

- SPCC cold rolled steel

Body color :

- RAL9005(Black)

Accessories Assembled:

- Fixing kit
- Cage nuts with screws 20pcs
- Front door with Round lock
- 4 mounting rails

Main Structure:




Details and Optional Accessories:




Knockable cable entry on the top



Top ventilation mesh

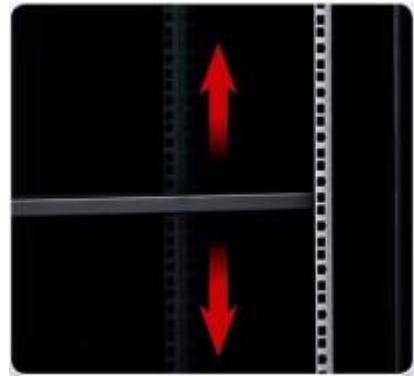

Adjustable tray

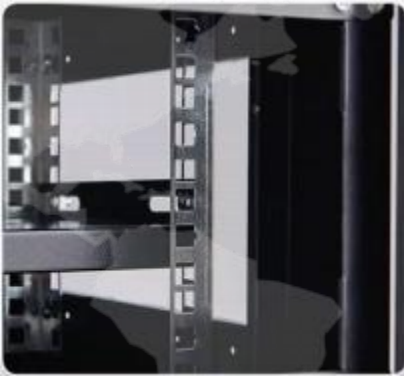

Thickened Mounting profile



Small round stainless lock



Removable side door



5mm Toughened glass



