Modules reset to factory default

Each module within the digital TV station may be reset to its factory default settings, whether in the event of an incorrect configuration or for the purpose of restoring it to its original parameters.

To proceed, connect the station and subsequently launch the management software.

On the startup screen, please **right**-click on the square representing the module you intend to reset (see below). Kindly refrain from using the left mouse button, as this will open the module's configuration page and may result in issues in the event of an incorrect configuration

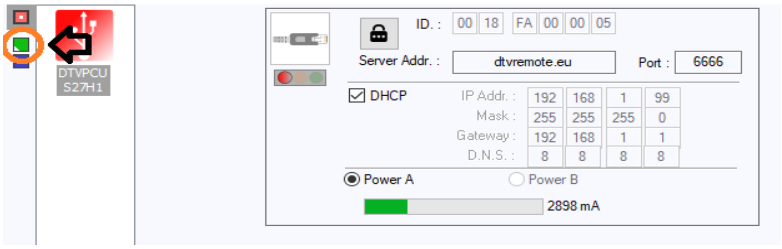

A pop-up menu will appear, from which you may select the module to proceed with the reset operation :

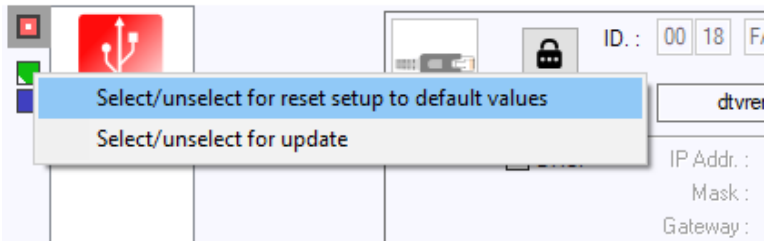

Once a module has been selected for the reset operation, it will be highlighted with a red border :



Should you wish to reset an additional module, proceed in the same manner.

Thereafter, **right**-click on the *Download Configuration* button and select the *Reset Headend Setup…* command from the pop-up menu. This action will restore all selected modules to their default configuration.

